CyberPower PDU81004 unité de distribution d'énergie 8 sortie(s) CA 1U Noir

Marque : CyberPower

Code produit: PDU81004

Nom du produit : PDU81004



CyberPower PDU81004. Types de PDU: Géré, Mesuré par prise, Avec contrôle en ligne, Commutable, Capacité du rack: 1U, Type: Monophasé. Nombre de prises en sortie: 8 sortie(s) CA, Types de sortie AC: Coupleur C13, Prise mâle: Coupleur C14. Longueur de câble: 3,05 m, Algorithme de sécurité soutenu: 802.1x RADIUS, HTTPS, SSH, SSL/TLS. Protocoles réseau pris en charge: IPv4/v6, SNMPv1/v3, HTTP/HTTPs, TCP/IP, UDP, DHCP, NTP, DNS, SMTP, SSH, SSL, TLS, Telnet, FTP,..., Mise à niveau du microprogrammable via: USB. Tension nominale à l'entrée: 100 - 240 V, Intensité (max.): 12 A, Fréquence d'entrée AC: 50 / 60 Hz



Design	
Types de PDU *	Géré, Mesuré par prise, Avec contrôle en ligne, Commutable
Type	Monophasé
Capacité du rack *	1U
Montage	horizontale
Matériau du boîtier/corps	Acier
Couleur du produit	Noir
Écran	LCD
Connectivité	
Nombre de prises en sortie *	8 sortie(s) CA
Prise mâle	Coupleur C14
Types de sortie AC *	Coupleur C13
Nombre de ports série	1
Nombre de port ethernet LAN (RJ-45)	4
Nombre de ports USB	1
Caractéristiques	
Connexion en guirlande	✔
Voyants	✔
Longueur de câble	3,05 m
Algorithme de sécurité soutenu	802.1x RADIUS, HTTPS, SSH, SSL/TLS
Caractéristiques de gestion	
Protocoles réseau pris en charge	IPv4/v6, SNMPv1/v3, HTTP/HTTPs, TCP/IP, UDP, DHCP, NTP, DNS, SMTP, SSH, SSL, TLS, Telnet, FTP, Syslog
Micrologiciel évolutif	✔
Mise à niveau du microprogrammable via	USB
Puissance	
Tension nominale à l'entrée *	100 - 240 V

Puissance	
Tension nominale de sortie	100 - 240 V
Certificat	
Certificats de conformité	RoHS
Certification	FCC Class A, UL60950, UL62368, EN 55032 Class A
Sustainability	
Conformité à la durabilité	✔
Conditions environnementales	
Température d'opération	0 - 60 °C
Température hors fonctionnement	-15 - 65 °C
Humidité relative de fonctionnement (H-H)	0 - 95%
Taux d'humidité relative (stockage)	0 - 95%
Altitude de fonctionnement	0 - 3500 m
Altitude de non fonctionnement	0 - 15000 m
Température d'opération	32 - 140 °F
Poids et dimensions	
Largeur	433 mm
Profondeur	112 mm
Hauteur	44 mm
Poids	2,1 kg
Contenu de l'emballage	
Logiciels fournis	PowerPanel Business, PowerPanel Enterprise
Informations sur l'emballage	
Poids du paquet	3,9 kg
Largeur du colis	500 mm
Profondeur du colis	250 mm
Hauteur du colis	65 mm


Puissance	
Fréquence d'entrée AC	50 / 60 Hz
Intensité (max.) *	12 A



0649532616244



649532616244

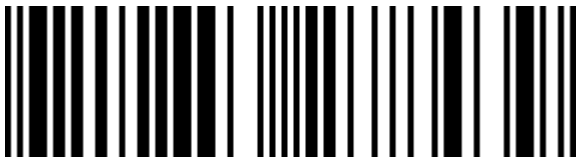

4712856278439

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity. Automated scraping, data mining, or harvesting for the purpose of training machine learning models, neural networks, or artificial intelligence systems is strictly prohibited without a commercial license.

Publication date: 06-NOV-2026. Prints or copies of Information are only valid on the printed Publication date